



DReAM: Diabetic Retinopathy Analysis using Machine Learning

Devendra Kumar Misra, Shubham Kumar Singh, Mohit Bhambri
and Krishna Pandey

EasyChair preprints are intended for rapid
dissemination of research results and are
integrated with the rest of EasyChair.

July 12, 2020

DReAM: Diabetic Retinopathy Analysis using Machine Learning

DEVENDRA KUMAR MISRA
Deptt. Of IT
HMRITM, New Delhi
misra.deven@gmail.com

SHUBHAM KUMAR SINGH
Deptt. Of IT
HMRITM, New Delhi
shubhamsinghsk763@gmail.com

MOHIT BHAMBRI
Deptt. Of IT
HMRITM, New Delhi
mohitbhambri121@gmail.com

KRISHNA PANDEY
Deptt. Of IT
HMRITM, New Delhi
krishnahotshot@gmail.com

ABSTRACT- The Diabetic Retinopathy(D.R) is an eye disease which occurs due to changes in blood vessels of retina because the patient is suffering from diabetes. It is the most common cause of blindness in the world. To avoid blindness caused by diabetes, the detection of diabetic retinopathy as quickly and early as possible is the only option as number of persons becoming blind because of this disease are huge and can't be done much if it is detected at a later stage. In this review paper we have focused on automatic detection of diabetic retinopathy through detecting retinal condition and also classify the stage of the (D.R). We studied various methods available to detect the (D.R). Detecting D.R early so that treatment on diabetic retinopathy can be done and blindness caused by it can be avoided. Decision making for the severity level of disease was performed by collaborating KNN and LBP algorithm which gives accuracy and reduces time of diagnosis of diabetic retinopathy(D.R).This paper presents review on various technique used for detection and diagnosis of diabetic retinopathy.

Keyword: Retinopathy, LBP, Feature extraction, KNN.

INTRODUCTION

Diabetic Retinopathy eye disease[1] is a primary cause of poor vision and blindness. Approximately 10% of all the patients diagnosed with the diabetes have vision problems. According to clinical tested results, early detection and treatment prevent 95% of the eye vision problems that are observed in diabetic eye

patients. For the patients suffering from diabetes, regular eye exams will be needed to obtain proper therapeutics before it is too late to get any positive results. In biomedical applications, automated retinal image analysis has made the detection of retinal pathologies much more easier for ophthalmologists, whereas conventional methods, such as dilating the eye pupil, takes time and makes the patients suffer for a while. Diabetic Retinopathy (DR) is caused by the damage to blood vessels of the retina. It occurs when high blood glucose, the characteristic of diabetes, has caused massive damage to the small vessels that provide oxygen and nutrients to the retina[2]. The proteins and lipids getting leaked from the bloodstream into the retina through damaged blood vessels is among the chief causes of this problem. The screening process for diabetic retinopathy involves excessive dilation of pupil which affects the patients' eye. So, automated methods are presented in this paper for detection of retinal damage from the non- dilated color fundus retinal images using morphological process. Degeneration in macula is caused by the drooping the central portion of the retina, inner most layer of the eye which archives images and also direct them via the optic nerve from the eye to the brain. Glitches in macula may occur at higher age but they were perceived at the second part of people life (40–60 years old)[3]. Diseases in macula have so many variations of shapes and textures and sometimes they are very large number of variations present that hard to recognize even by skill doctors.

In such situation this algorithm becomes very useful tool not only for doctors but also for researchers. That's why we are trying to build up and optimize such a algorithm which is based on brainy image classification[4]. The image of the retina acquired using a retinal investigation camera . An image processing module can be used for quality improvements or geometrical transformations. A certain features of image is then habitually extracted, the obtained values being applied to the inputs of the K – Nearest Neighbor (KNN) used for image Classification/recognition.

PROPOSED SYSTEM

In the first stage we tried to gather the dataset of the images. We got the dataset from the kaggle website[5]. In the dataset we have the collection of images starting from stage 0 to stage 4 .On the basis of the feature of the image the stage of Diabetic Retinopathy is predicted. Then the dataset is used for training and testing purpose where most of the database is used for training purpose and the rest is used for testing purpose. KNN classifier[6] is being used for the training purpose .Then when the training part is done and the machine has learnt to predict the output on giving the specific input. And it predicts it on the basis of the knowledge which the model gets from the dataset and display the specific result. And in the final stage we get the accuracy of our model whether our model is good enough to predict the accurate result. The whole flowchart of the system is described in fig. 1.

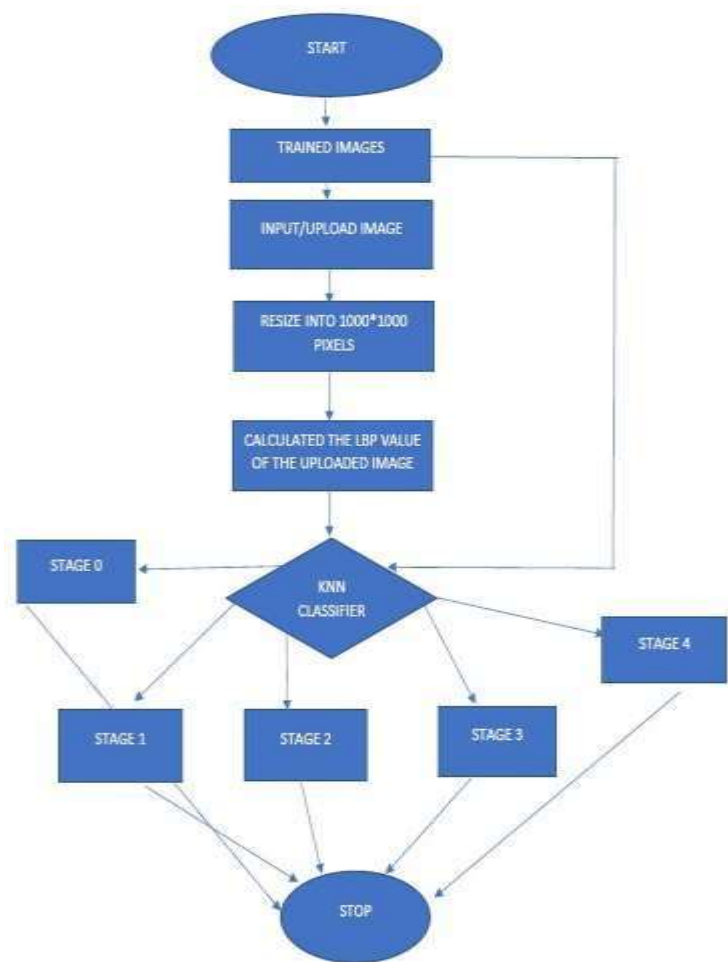


Fig. 1: Flowchart of the System

METHODS

KNN

In pattern recognition, the k-nearest neighbors algorithm (k-NN) is a non-parametric method used for classification

and regression. In both cases, the input consists of the k closest training examples in the feature space. The output depends on whether k-NN is used for classification or regression. The training examples are vectors in a multidimensional feature space, each with a class label. The training phase of the algorithm consists only of storing the feature vectors and class labels of the training samples.

LBP

Local binary patterns (LBP)[7] is a type of visual descriptor used for classification in computer vision. LBP is the particular case of the Texture Spectrum model proposed in 1990. LBP was first described in 1994. It has since been found to be a powerful feature for texture classification; it has further been determined that when LBP is combined with the Histogram of oriented gradients (HOG) descriptor, it improves the detection performance considerably on some datasets.

MYSQL LOG COMMUNITY

MySQL Community Edition[8] is the freely downloadable version of the world's most popular open source database. It is available under the GPL license and is supported by a huge and active community of open source developers.

SYSTEM WORKING

We trained the dataset of the images and after few hours when the dataset is trained We can provide Input or we can upload the image of the scanned eye. Then the system will resize the input image in 1000* 1000 resolution so that it can predict only when the dimension are same. After extracting the feature then it will calculate the local binary pattern (LBP)value of the uploaded image and compare it with the known value of LBP. Using KNN it classify the images and give the result whether it has normal eye, mild DR , Moderate DR, Severe DR, Proliferative DR respectively. At last on the basis of the stage it even provide the prognosis and medication with a proper bar graph. Apart from it our advance java website will help the patients to diagnose their eyes on their own. It has three panels i.e. Patient panel, Employee panel and Admin panel. Patient panel as shown in fig. 2 provides various functionalities like adding of new patient, uploading their report, take appointment of doctors and download their prescription and report after doctor uploads them on their panel. Employee panel as shown in fig. 3 first see who has taken their appointment, confirm their status, download their report and put them for checking into machine learning model as shown in fig. 4. After this the screenshot of this result plus some prescription will be uploaded to patient portal. Third panel i.e. Admin panel works to manage all the panel doctors that were registered on their panel i.e. add and delete them, search form them, update their details etc.

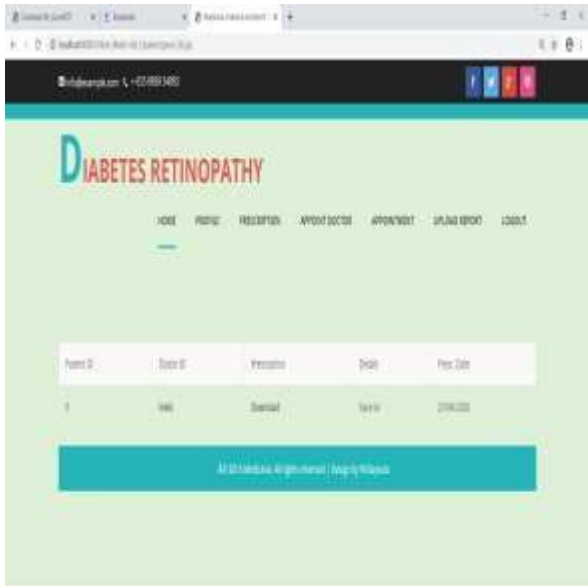


Fig.2: Patient Panel(Frontend System)



Fig. 3: Doctor Panel(Frontend System)

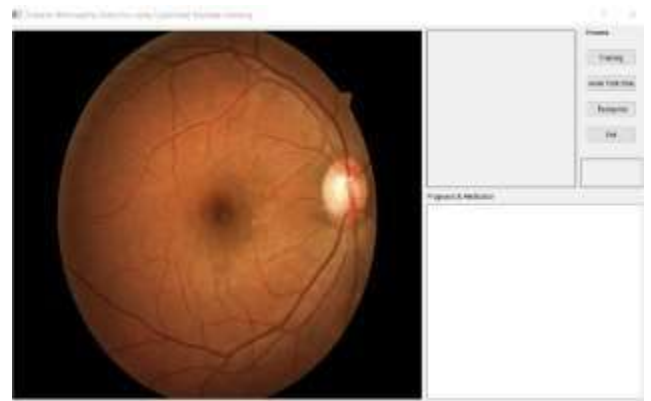


Fig. 4: Backend System

RESULT

In the proposed method features are extracted from the images by using LBP function which are local binary pattern values and all the these features were given as an input to the KNN classifier. 4000 images were given as an input classifier to train the features. In these 4000 images some of them belongs to 0 category while others belong to 1,2,3, or 4 category. The complete result is shown in fig. 5 below. The result is showing the stage of D.R and corresponding steps and precautions.

Stage 0	Stage 1	Stage 2	Stage 3	Stage 4
Normal DR	Mild DR	Moderate DR	Severe DR	Proliferative DR

Table 1: Diabetic Retinopathy Table

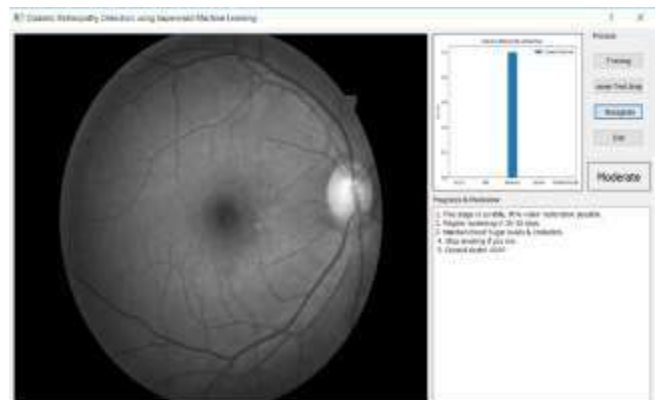


Fig. 5: Result

FUTURE SCOPE

For any research, there is always room for improvement. Ours is not an exception of that. We have found some areas where this system can be improvised. This can be improvised with a lot more categorized such as according to ages, genders, background studies, working facilities and so on.. CRF (Conditional Random Field), maximum entropy and other probabilistic graphical model can also be used to train our dataset in order to improve the algorithm. A hardware product can be the best solution for patient So, we are looking forward to build a hardware system. If we use huge amount of dataset, machine will train more and it would give us more accurate prediction and accuracy.

CONCLUSION

We have tried to construct an ensemble to predict if a patient has diabetic retinopathy using features from retinal photos[9]. For both sets KNN is providing higher accuracy rate for predicting DR. Despite the shortcomings in reaching good performance results, this work provided a means to make use and test machine learning algorithms and try to arrive to ensemble models that would outperform individual learners.It also allowed

exploring a little feature selection, Feature extraction[10] and ensemble selection problems[11] and experiences the constraints in computation time when looking for possible candidate models in high combinatorial spaces, even for a small dataset as the one used. The structure of our project has been built in such a way that with proper dataset and minor alternation it can work to classify the disease in any number of categories. KNN provides an easy and cheap way to classify diabetic retinopathy stages on scale 0-4 without requirements for high graphic card and high RAM and CPU. The accuracy we achieved from the model is 74.68%. Some of the features which were considered during the design of this system were cost- effective and easy to install when compared to existing systems. The design is flexible, can be modified according to user specifications.

REFERENCES

- [1]Gandhi M. and Dhanasekaran R. ,“Diagnosis of Diabetic Retinopathy Using Morphological Process and SVM Classifier”, IEEE International conference on Communication and Signal Processing, India pp: 873-877,2013
- [2] Li T, Meindert N, Reinhardt JM, Garvin MK, “Abramoff MD Splat Feature Classification with Application to Retinal Hemorrhage Detection in Fundus Images”, IEEE Transactions on Medical Imaging,2013

[3] Tiago T.G. “Machine Learning on the Diabetic Retinopathy Debrecen Dataset”, knowledge-Based System60, 20-27. Published on June 25, 2016

[4] <https://towardsdatascience.com/pytorchvision-binary-image-classification-d9a227705cf9>

[5] <https://www.kaggle.com/c/diabetic-retinopathy/data>

[6] Rajendra Acharya U., E. Y. K. Ng, Kwan-Hoong Ng, Jasjit S. Suri “algorithms for the automated detection of diabetic retinopathy using digital fundus images” pp 145–157, 2012

[7] Varun G., Lily P., Mark C., “Development and validation of a deep learning Algorithm for Detection of Diabetic Retinopathy”, December 2016.

[8] Alex C, Boston A.”Artificial Intelligence, Deep Learning, and Neural Networks, Explained”, 2016.

[9] R. Sivakumar, G. Ravindran, M. Muthayya, S. Lakshminarayanan and C. U. Velmurughendran, “Diabetic Retinopathy Classification”, IEEE International Conference on Convergent Technologies for the AsiaPacific Region, Vol. 1, pp. 205 - 208, 2003.

[10] <https://deeptai.org/machine-learning-glossary-and-terms/feature-extraction>

[11] Wong Li Yun, U. Rajendra Acharya, Y. V. Venkatesh, Caroline Cheec, Lim Choo Min and E. Y. K. Ng “Identification of different stages of diabetic retinopathy using retinal optical images”, Information Sciences, pp. 106 – 121, 2008.